


STOP!

**BE SURE TO WATCH
INSTALL VIDEO FIRST!**

www.amzer.com/shatterproof/

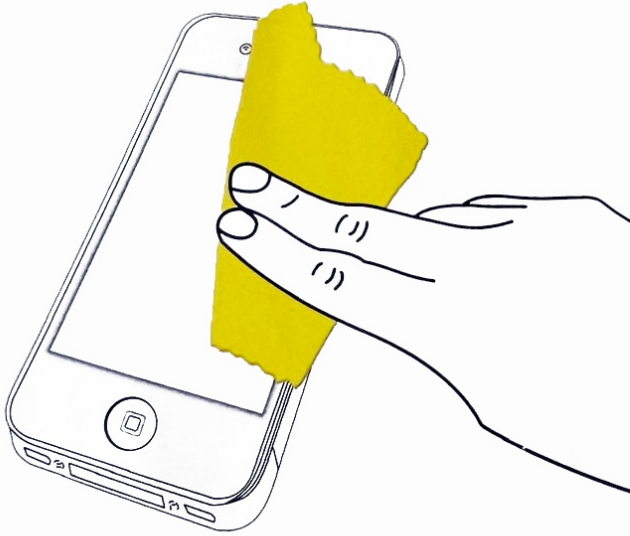

1

Turn device off. In a dust-free environment thoroughly clean screen with included micro-fiber cloth.



2

Gently lift the Shatterproof film away from the paper packing. Peel and fold back the paper backing about an inch. Be sure to leave the remaining paper backing attached to the shatterproof film.



3

Lay adhesive side down onto screen, carefully aligning cutouts and sides. Be sure not to touch the adhesive side with fingers.



4

Take the included squeegee and in one deliberate motion apply the entire shatterproof film. This will simultaneously remove the paper backing. Remember to keep the Shatterproof away from the screen until applied with squeegee. Once applied, push air bubbles to the nearest edge. Remaining air bubbles will fully dissipate in 24-48 hrs.